

Cofo

Truck and Bus Tire Catalog



VIETNAM COFO TIRES COMPANY LIMITED

Lot CN13, CN14, Zone B-Bim Son Industrial Park, Ba Dinh Ward, Bim Son Town,

Thanh Hoa Province, Vietnam

E-mail: sales@cofotires.com.vn





Cofo VIETNAM COFO TIRES COMPANY LIMITED

Cofo Tires (Vietnam) Company Limited is a specialized company that produces passenger tires and commercial tires; The company is located in Bien Son City, Thanh Hoa Province, with a superior geographical location and convenient transportation; The company has a production capacity of 2 million pcs of TBR tires and 10 million pcs of PLT tires, with major brands Hifly, Ovation, Sunfull and Mirage.

COFO has internationally advanced manufacturing technology and production equipment, excellent tire production and testing capabilities, and a professional R&D team, and has established a strong product quality assurance system.

COFO mainly produces diverse radial tires, the products can be widely used in cars, SUVs, light trucks, trucks and buses, etc. The company has a complete range of products of superior quality, which are popular in global markets.



Công ty TNHH Lớp COFO Việt Nam

Công ty TNHH Lớp COFO Việt Nam là một công ty chuyên nghiệp sản xuất lốp xe hơi và lốp xe thương mại. Công ty CoFo nằm ở thành phố Biên Sơn, tỉnh Thanh Hóa, vị trí địa lý ưu việt và giao thông thuận tiện. Công ty có khả năng sản xuất 2 triệu bộ lốp xe TBR và 10 triệu bộ lốp xe PLT.

Công ty CoFo có công nghệ và thiết bị sản xuất lốp xe tiên tiến đạt tiêu chuẩn quốc tế, có khả năng sản xuất và thử nghiệm xuất sắc, có một đội ngũ nghiên cứu và khai thác chuyên nghiệp, đã xây dựng hệ thống đảm bảo chất lượng sản phẩm mạnh mẽ.

Công ty CoFo sản xuất tất cả các loại lốp xe radial, sản phẩm có thể sử dụng rộng rãi cho xe hơi, SUV, xe tải nhẹ, xe tải và xe buýt...sản phẩm chất lượng cao và bán chạy trên khắp thế giới.

COFO
RADIAL
PRTTERN
RANGE

ROAD

LONG & REGIONAL HAUL

MIXED SERVICE

OFF ROAD

POSITION

ALL POSITION



STEER/TRAILER



DRIVE



TRAILER





HF662

Features

- ▶ Four wide circumferential grooves
- ▶ Siped rib and shoulder design
- ▶ Reinforced carcass and wide tread
- ▶ Specially designed compound

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Provide excellent heat dissipation
- ▶ Ensure excellent handling and safe performance
- ▶ Deliver lower rolling resistance



HF660

Features

- ▶ Four wide circumferential grooves
- ▶ Siped rib and shoulder design
- ▶ Reinforced carcass and wide tread
- ▶ Specially designed compound

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Provide excellent heat dissipation
- ▶ Ensure excellent handling and safe performance
- ▶ Deliver lower rolling resistance



HF606

Features

- ▶ Four zigzag grooves
- ▶ Solid shoulder design
- ▶ Variable pitch design
- ▶ Specially designed compound

Benefits

- ▶ Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- ▶ Provide outstanding resistance to abrasion
- ▶ Reduce rolling noise greatly
- ▶ Deliver lower rolling resistance



Operation:

- Highways and long distance / Regional highways and city streets
- Well paved road conditions / Mainly used on paved roads, occasionally run on unpaved roads
- Constant and high speed with minimal braking and accelerating / Frequent braking, accelerating and turning

Size	HF662	HF660	HF606
11R22.5		148/145M	148/145M
13R22.5		156/152 L(154/151 M)	
215/75R17.5		135/133J	
255/70R22.5		140/137L	
295/80R22.5	152/149M	152/149M	
315/70R22.5		154/150 L(152/148 M)	
315/80R22.5		156/152 L(154/151 M)	



STEER/TRAILER



Features

- ▶ Four wide circumferential grooves
- ▶ Siped rib and shoulder design
- ▶ Specially designed compound

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Provide excellent heat dissipation
- ▶ Deliver lower rolling resistance



Features

- ▶ Solid rib design combined with multiple sipes
- ▶ Four wide circumferential grooves
- ▶ Solid shoulder design

Benefits

- ▶ Provide excellent heat dissipation and improved regular wear with lower resistance
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Provide outstanding resistance to abrasion



Features

- ▶ Four circumferential grooves
- ▶ Solid shoulder design
- ▶ Specially designed compound

Benefits

- ▶ Provide excellent anti-sidesliping performance and ensure excellent water evacuation
- ▶ Provide outstanding resistance to abrasion
- ▶ Reduce rolling noise greatly
- ▶ Deliver lower rolling resistance



Features

- ▶ Solid rib design combined with multiple sipes
- ▶ Four wide circumferential grooves
- ▶ Solid shoulder design

Benefits

- ▶ Provide excellent heat dissipation and improved regular wear with lower resistance
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Provide outstanding resistance to abrasion

Size	HF688	HF111	HF121	HF124
9.5R17.5			143/141J	
11R22.5		146/143L		
11R24.5		146/143M		
11R24.5		149/146L		
215/75R17.5		135/133J		
235/75R17.5		143/141J		
225/70R19.5		128/126L		
245/70R19.5		135/133L		
255/70R22.5		140/137L		
295/75R22.5		144/141M		
295/75R22.5		146/143L		
295/80R22.5	152/149M		152/149M	
315/70R22.5			154/150L(152/148M)	
315/80R22.5			156/152L(154/151M)	156/152L(154/151M)
285/75R24.5		144/141M		
285/75R24.5		147/144L		



STEER/TRAILER



Features

- ▶ Four wide circumferential grooves
- ▶ Siped rib and shoulder design
- ▶ Reinforced carcass and wide tread
- ▶ Specially designed compound

Benefits

- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Provide excellent heat dissipation
- ▶ Ensure excellent handling and safe performance
- ▶ Deliver lower rolling resistance



Features

- ▶ Four straight grooves design
- ▶ Tread surface with fine steel sipes design
- ▶ Stone ejectors set at the bottom of the side grooves
- ▶ Special tread compound formula for mid to long distance

Benefits

- ▶ Provides excellent water drainage performance
- ▶ Provides good drainage and ensures good grip ability
- ▶ Protects the bottom of the grooves from hard gouges and cracks
- ▶ Improves tyre wear mileage

Size	RSHF905	RSHF162+
275/80R22.5	149/146M	149/146M



DRIVE



Features

- ▶ Special tread compound
- ▶ Four circumferential grooves
- ▶ Deeper tread depth design
- ▶ Block pattern design

Benefits

- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Improved mileage performance
- ▶ Provide excellent driving and braking force

HF668



Features

- ▶ Block pattern design
- ▶ Solid shoulder design
- ▶ Four wide circumferential grooves

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Provide outstanding resistance to abrasion
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation

HF312



Features

- ▶ Asymmetric lug design
- ▶ Block pattern design
- ▶ Four circumferential grooves
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Combine regular wear with excellent traction
- ▶ Provide excellent driving and braking force
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity

HF628



Features

- ▶ Block pattern design
- ▶ Extra wide footprint
- ▶ Deeper tread depth design

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Enhanced stability and resistance to abrasion
- ▶ Improved mileage performance

HF638

Size

HF668

HF628

HF312

HF638

11R22.5

148/145M

146/143L

148/145M

11R24.5

146/143M

11R24.5

149/146L

13R22.5

156/152L(154/151M)

215/75R17.5

135/133J

235/75R17.5

143/141J

285/75R24.5

144/141M

285/75R24.5

147/144L

295/75R22.5

146/143L

295/80R22.5

152/149M

152/149M

315/70R22.5

154/150L(152/148M)

154/150L(152/148M)

315/80R22.5

156/152L(154/151M)

156/152L(154/151M)

275/80R22.5

149/146L



DRIVE



Features

- ▶ Block pattern design
- ▶ Open shoulder design
- ▶ Deeper tread depth design

Benefits

- ▶ Provide excellent traction
- ▶ Improved heat dissipation to increase tire life
- ▶ Provide mileage performance

HF323



Features

- ▶ Optimized void ratio and ground contact design
- ▶ Deeper grooves and strong block design
- ▶ Special tread compound formula for medium and long distance
- ▶ Optimized shoulder design

Benefits

- ▶ Delivers excellent ground footprint for improved wear performance
- ▶ Provides good driving, handling and wet grip performance
- ▶ Provides more mileage in a variety of conditions
- ▶ Improves tire crown anti-knock performance

RSHF356



Features

- ▶ Asymmetric lug design
- ▶ Block pattern design
- ▶ Four circumferential grooves
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Combine regular wear with excellent traction
- ▶ Provide excellent driving and braking force
- ▶ Ensure excellent water evacuation, even pressure distribution and heat dissipation
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity

HF326



Features

- ▶ Block pattern design
- ▶ Extra wide footprint
- ▶ Deeper tread depth design

Benefits

- ▶ Provide excellent driving and braking force
- ▶ Enhanced stability and resistance to abrasion
- ▶ Improved mileage performance

HF592

Size

HF323

HF326

RSHF356

HF592

11R22.5

146/143L

11R24.5

149/146L

285/75R24.5

147/144L

295/75R22.5

146/143L

275/80R22.5

149/146L

295/80R22.5

152/149M

152/149M



TRAILER



Features

- Four zigzag grooves
- Extra wide footprint with square shoulder
- Special tread compound

Benefits

- Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- Enhanced stability and resistance to abrasion
- Provide outstanding resistance to abrasion

ST022



Features

- Four circumferential grooves
- Special groove design
- Curved lug design

Benefits

- Ensure excellent water evacuation, even pressure distribution and heat dissipation
- Deliver stone-ejecting property
- Deliver excellent driving and braking force

HF618



Features

- Four circumferential groove designs
- Reduced tire weight

Benefits

- Improved antiskid performance
- Deliver rolling resistance and lower fuel consumption

HF126



Features

- Special tread compound for long haul
- High-identification pattern design
- Wide footprint design
- Four wide circumferential grooves with siped design
- Siped rib design

Benefits

- Provide better mileage and wear resistance
- Elegant and performance
- Enhanced stability and resistance to abrasion
- Provide excellent handling and wet grip performance
- Optimize driving and braking force, preventing irregular wear

HF112

Size	ST022	HF618	HF126	HF112
11R22.5		148/145M	146/143L	
11R24.5			149/146L	
225/70R19.5				128/126L
245/70R19.5				135/133L
235/75R17.5	144/141J			
285/75R24.5			147/144L	
295/75R22.5		144/141M		
295/75R22.5		146/143L	146/143L	
385/65R22.5	160K			



M



Mixed Service



Operation:

- Frequently used on and off roads
- Heavier loads
- Construction site



ALL POSITION



HF702

Features

- ▶ Three zigzag grooves
- ▶ Combination of rib and lug design
- ▶ Shoulder design with lugs

Benefits

- ▶ Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- ▶ Deliver outstanding traction and handling
- ▶ Provide excellent heat dissipation



ST011

Features

- ▶ Three zigzag grooves
- ▶ Combination of rib and lug design
- ▶ Shoulder design with lugs

Benefits

- ▶ Provide excellent anti-sideslipping performance and ensure excellent water evacuation
- ▶ Deliver outstanding traction and handling
- ▶ Provide excellent heat dissipation



HF572

Features

- ▶ All position tread pattern design
- ▶ Special tread compound formula for Mid-Short distance
- ▶ Triple zigzag main grooves and shoulder cross grooves design
- ▶ Sipes design on tread surface

Benefits

- ▶ For a wide range of complex road conditions
- ▶ Provides good tear resistance and improves wear mileage
- ▶ Provides good grip on both dry and wet conditions
- ▶ Improves handling performance in wet conditions



HF768

Features

- ▶ Special tread compound
- ▶ Block pattern design
- ▶ Extra wide footprint with square shoulder
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Provide excellent driving and braking force
- ▶ Enhanced stability and resistance to abrasion
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



HF768W

Features

- ▶ Large block & Deep groove design
- ▶ Open shoulder design
- ▶ Optimized tread compound
- ▶ Special horizontal small groove design

Benefits

- ▶ Provides excellent traction and braking force
- ▶ Provides good traction and self-cleaning performance
- ▶ Provides excellent tear resistance, cut resistance and snow traction
- ▶ Improve snow traction performance

Size	HF702	ST011	HF572
11R22.5	148/145M		
13R22.5	156/152L(154/151M)		
11R24.5	149/146L		
315/80R22.5		156/152L(154/151M)	
275/80R22.5			149/146L
295/80R22.5			152/149M

Size	HF768	HF768W
13R22.5	156/152L(154/151M)	
295/80R22.5	152/149K	
315/80R22.5	156/152L(154/151M)	156/152L(154/151M)



HF707

Features

- ▶ Special tread compound
- ▶ Block pattern design
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Improved traction, driving and braking performance
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



HF318

Features

- ▶ Lug and block pattern design
- ▶ Special tread compound
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Improved traction, driving and braking performance
- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity



HF320

Features

- ▶ Special tread compound
- ▶ Lug and block pattern design
- ▶ Reinforced carcass and bead design

Benefits

- ▶ Provide outstanding resistance to puncture and tearing
- ▶ Improved traction, driving and braking performance
- ▶ Ensure excellent handling and safe performance and provide outstanding loading capacity

Size	HF707	HF318	HF320
295/80R22.5	152/149F	152/149C	152/149C
315/80R22.5		156/152L(154/151M)	



Operation:

- Mostly used on rugged terrain like mining or heavy construction
- Heavier loads
- High risk of damage from road conditions

PRODUCT RANGE



DIMENSION	HF662	HF660	HF606	HF688	HF111	HF121	HF124	RSHF905	RSHF162+	HF668	HF628	HF312	HF638	HF323	HF326	RSHF356	HF592	ST022	HF618	HF126	HF112
11R22.5 16PR		148/145M	148/145M		146/143L						148/145M	146/143L	148/145M	146/143L					146/143L	146/143L	
13R22.5 20PR		156/152L(154/151M)									156/152L(154/151M)										
11R24.5 14PR					146/143M							146/143M		146/143M							
11R24.5 16PR					149/146L							149/146L		149/146L							149/146L
215/75R17.5 16PR		135/133J			135/133J						135/133J										
235/75R17.5 16PR					143/141J						143/141J							143/141J			
225/70R19.5 14PR					128/126L																128/126L
245/70R19.5 16PR					135/133L																135/133L
255/70R22.5 16PR		140/137L			140/137L																
295/75R22.5 14PR					144/141M							144/141M		144/141M						144/141M	
295/75R22.5 16PR					146/143L							146/143L		146/143L						146/143L	146/143L
295/80R22.5 18PR	152/149M	152/149M		152/149M		152/149M				152/149M	152/149M				152/149M		152/149M				
315/70R22.5 20PR		154/150L(152/148M)				154/150L(152/148M)					154/150L(152/148M)		154/150L(152/148M)								
315/80R22.5 20PR		156/152L(154/151M)				156/152L(154/151M)	156/152L(154/151M)				156/152L(154/151M)		156/152L(154/151M)								
285/75R24.5 14PR					144/141M							144/141M		144/141M							
285/75R24.5 16PR					147/144L							147/144L		147/144L							147/144L
385/65R22.5 20PR																		160K			
275/80R22.5 18PR								149/146M	149/146 M	149/146L						149/146L					


PRODUCT RANGE



DIMENSION	HF702	ST011	HF572	HF768	HF768W													
11R22.5 16PR	148/145M																	
13R22.5 20PR	156/152L(154/151M)			156/152L(154/151M)														
11R24.5 16PR	149/146L																	
275/80R22.5 18PR			149/146L															
295/80R22.5 18PR			152/149M	152/149K														
315/80R22.5 20PR		156/152L(154/151M)		156/152L(154/151M)	156/152L(154/151M)													

Technical File

Size	PR	Width	A/R	Rim	LOAD INDEX	SPEED RATING	PATTERN	M+S	APPLIC ATION	STANDARD RIM	MAX LOAD SINGLE/DUAL(kg)	MAX LOAD SINGLE/DUAL(LBS)	MAX PRESSURE SINGLE/DUAL(PSI)	MAX PRESSURE SINGLE/DUAL(PSI)	TREAD DEPTH (mm)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)
11R22.5	16PR	11		22.5	148/148	M	BF660	M+S	LAR	8.25	3150/2900	6950/6400	850/850	123/123	15	286	1051
11R22.5	16PR	11		22.5	148/145	M	BF638	M+S	LAR	8.25	3150/2900	6940/6395	850/850	123/123	20	286	1082
11R22.5	16PR	11		22.5	148/145	M	BF606	M+S	LAR	8.25	3150/2900	6940/6395	850/850	123/123	15	286	1048
11R22.5	16PR	11		22.5	146/143	L	BF523	M+S	LAR	8.25	3000/2725	6610/6005	830/830	120/120	21.5	286	1065
11R22.5	16PR	11		22.5	146/143	L	BF312	M+S	LAR	8.25	3000/2725	6610/6005	830/830	120/120	21.5	286	1065
11R22.5	16PR	11		22.5	146/143	L	BF111	M+S	LAR	8.25	3000/2725	6610/6005	830/830	120/120	15	286	1052
11R22.5	16PR	11		22.5	148/145	M	BF702	M+S	M	8.25	3150/2900	6940/6395	850/850	123/123	15.5	286	1053
11R22.5	16PR	11		22.5	148/145	M	BF618	M+S	LAR	8.25	3150/2900	6940/6395	850/850	123/123	11.5	279	1054
11R22.5	16PR	11		22.5	148/145	M	BF628	M+S	LAR	8.25	3150/2900	6940/6395	850/850	123/123	16.5	286	1055
11R22.5	16PR	11		22.5	146/143	L	BF126	M+S	LAR	8.25	3000/2725	6610/6005	830/830	120/120	10	279	1050
11R24.5	16PR	11		24.5	149/146	L	BF111	M+S	LAR	8.25	3250/3000	7160/6610	830/830	120/120	15	288	1103
11R24.5	16PR	11		24.5	149/146	L	BF312	M+S	LAR	8.25	3250/3000	7160/6610	830/830	120/120	21.5	288	1116
11R24.5	16PR	11		24.5	149/146	L	BF702	M+S	M	8.25	3250/3000	7160/6610	830/830	120/120	15.5	279	1104
11R24.5	16PR	11		24.5	149/146	L	BF323	M+S	LAR	8.25	3250/3000	7160/6610	830/830	120/120	21.5	288	1116
11R24.5	16PR	11		24.5	149/146	L	BF126	M+S	LAR	8.25	3250/3000	7160/6610	830/830	120/120	10	288	1103
13R22.5	20PR	13		22.5	156/152(154/151)	L(M)	BF660	M+S	LAR	9.75	4000/3550	8820/7830	860/860	125/125	17	322	1124
13R22.5	20PR	13		22.5	156/152(154/151)	L(M)	BF702	M+S	M	9.75	4000/3550	8820/7830	860/860	125/125	16.5	322	1123
13R22.5	20PR	13		22.5	156/152(154/151)	L(M)	BF768	M+S	M	9.75	4000/3550	8820/7830	860/860	125/125	20	322	1130
13R22.5	20PR	13		22.5	156/152(154/151)	L(M)	BF628	M+S	LAR	9.75	4000/3550	8820/7830	860/860	125/125	16	322	1126
215/76R17.5	16PR	215	75	17.5	135/133	J	BF660	M+S	LAR	6.00	2180/2060	4805/4540	850/850	123/123	12	219	764
215/76R17.5	16PR	215	75	17.5	135/133	J	BF111	M+S	LAR	6.00	2180/2060	4805/4540	850/850	123/123	13	219	766
215/76R17.5	16PR	215	75	17.5	135/133	J	BF628	M+S	LAR	6.00	2180/2060	4805/4540	850/850	123/123	14	219	768
225/70R19.5	14PR	225	70	19.5	128/126	L	BF111	M+S	LAR	6.75	1800/1700	3970/3750	760/760	110/110	13	236	808
225/70R19.5	14PR	225	70	19.5	128/126	L	BF112	M+S	LAR	6.75	1800/1700	3970/3750	760/760	110/110	12	236	806
235/75R17.5	16PR	235	75	17.5	143/141	J	BF022	M+S	LAR	6.75	2725/2575	6005/5675	875/875	127/127	13	240	795
235/75R17.5	16PR	235	75	17.5	143/141	J	BF111	M+S	LAR	6.75	2725/2575	6005/5675	875/875	127/127	13	240	795
235/75R17.5	16PR	235	75	17.5	143/141	J	BF628	M+S	LAR	6.75	2725/2575	6005/5675	875/875	127/127	15	240	799
245/70R19.5	16PR	245	70	19.5	135/133	L	BF111	M+S	LAR	7.50	2180/2060	4805/4540	830/830	120/120	13	256	838
245/70R19.5	16PR	245	70	19.5	135/133	L	BF112	M+S	LAR	7.50	2180/2060	4805/4540	830/830	120/120	12	256	836
255/70R22.5	16PR	255	70	22.5	140/137	L	BF660	M+S	LAR	7.50	2500/2300	5510/5070	830/830	120/120	14	263	925
255/70R22.5	16PR	255	70	22.5	140/137	L	BF111	M+S	LAR	7.50	2500/2300	5510/5070	830/830	120/120	13	263	925
275/80R22.5	18PR	275	80	22.5	149/146	M	RSBF162+	M+S	LAR	8.25	3250/3000	7160/6610	850/850	123/123	14.5	282	1012
275/80R22.5	18PR	275	80	22.5	149/146	L	RSBF356	M+S	LAR	8.25	3250/3000	7160/6610	850/850	123/123	19	282	1019
275/80R22.5	18PR	275	80	22.5	149/146	L	RSBF572	M+S	LAR	8.25	3250/3000	7160/6610	850/850	123/123	15	282	1013
275/80R22.5	18PR	275	80	22.5	149/146	M	RSBF905	M+S	LAR	8.25	3250/3000	7160/6610	850/850	123/123	14.5	282	1012
275/80R22.5	18PR	275	80	22.5	149/146	L	BF668	M+S	LAR	8.25	3250/3000	7160/6610	850/850	123/123	18.5	282	1019
285/75R24.5	16PR	285	75	24.5	147/144	L	BF111	M+S	LAR	8.25	3075/2900	6780/6175	830/830	120/120	15.5	284	1050
285/75R24.5	16PR	285	75	24.5	147/144	L	BF312	M+S	LAR	8.25	3075/2900	6780/6175	830/830	120/120	22	284	1083
285/75R24.5	16PR	285	75	24.5	147/144	L	BF323	M+S	LAR	8.25	3075/2900	6780/6175	830/830	120/120	22	284	1083
285/75R24.5	16PR	285	75	24.5	147/144	L	BF126	M+S	LAR	8.25	3075/2900	6780/6175	830/830	120/120	10	284	1050
295/75R22.5	16PR	295	75	22.5	146/143	L	BF111	M+S	LAR	9.00	3000/2725	6610/6005	830/830	120/120	15.5	294	1012
295/75R22.5	16PR	295	75	22.5	146/143	L	BF312	M+S	LAR	9.00	3000/2725	6610/6005	830/830	120/120	22	294	1025
295/75R22.5	16PR	295	75	22.5	146/143	L	BF618	M+S	LAR	9.00	3000/2725	6610/6005	830/830	120/120	11	294	1003
295/75R22.5	16PR	295	75	22.5	146/143	L	BF323	M+S	LAR	9.00	3000/2725	6610/6005	830/830	120/120	22	294	1025
295/75R22.5	16PR	295	75	22.5	146/143	L	BF126	M+S	LAR	9.00	3000/2725	6610/6005	830/830	120/120	10	294	1012
295/80R22.5	18PR	295	80	22.5	152/149	F	BF707	M+S	O	9.00	3550/3250	7830/7160	900/900	130/130	21.5	308	1050
295/80R22.5	18PR	295	80	22.5	152/149	M	BF668	M+S	LAR	9.00	3550/3250	7830/7160	900/900	130/130	18	308	1040
295/80R22.5	18PR	295	80	22.5	152/149	M	BF660	M+S	LAR	9.00	3550/3250	7830/7160	900/900	130/130	15	308	1037
295/80R22.5	18PR	295	80	22.5	152/149	M	BF121	M+S	LAR	9.00	3550/3250	7830/7160	900/900	130/130	16.5	308	1040
295/80R22.5	20PR	295	80	22.5	154/144	L	BF121	M+S	LAR	9.00	3750/3250	8270/7160	850/850	123/123	16.5	308	1040
295/80R22.5	18PR	295	80	22.5	152/149	M	BF628	M+S	LAR	9.00	3550/3250	7830/7160	900/900	130/130	20.5	308	1048
295/80R22.5	18PR	295	80	22.5	152/149	F	BF768	M+S	LAR	9.00	3550/3250	7830/7160	900/900	130/130	21.5	298	1050
295/80R22.5	18PR	295	80	22.5	152/149	M	BF668	M+S	LAR	9.00	3550/3250	7830/7160	900/900	130/130	15	308	1037
295/80R22.5	18PR	295	80	22.5	152/149	C	BF318	M+S	O	9.00	3550/3250	7830/7160	900/900	130/130	21.5	308	1050
295/80R22.5	18PR	295	80	22.5	152/149	C	BF320	M+S	O	9.00	3550/3250	7830/7160	900/900	130/130	21.5	308	1050
295/80R22.5	18PR	295	80	22.5	152/149	F	BF768	M+S	M	9.00	3550/3250	7830/7160	900/900	130/130	21.5	308	1050
295/80R22.5	18PR	295	80	22.5	152/149	M	BF326	M+S	LAR	9.00	3550/3250	7830/7160	900/900	130/130	18	308	1040
295/80R22.5	18PR	295	80	22.5	152/149	M	BF572	M+S	M	9.00	3550/3250	7830/7160	900/900	130/130	17	308	1041
295/80R22.5	18PR	295	80	22.5	152/149	M	BF662	M+S	LAR	9.00	3550/3250	7830/7160	900/900	130/130	15.5	298	1044
295/80R22.5	18PR	295	80	22.5	152/149	M	BF692	M+S	LAR	9.00	3550/3250	7830/7160	900/900	130/130	22.5	298	1044
315/70R22.5	20PR	315	70	22.5	154/150(152/148)	L(M)	BF638	M+S	LAR	9.00	3750/3350	8270/7390	900/900	130/130	20	320	1022
315/70R22.5	20PR	315	70	22.5	154/150(152/148)	L(M)	BF121	M+S	LAR	9.00	3750/3350	8270/7390	900/900	130/130	15.5	320	1013
315/70R22.5	20PR	315	70	22.5	156/150(154/150)	L(M)	BF121	M+S	LAR	9.00	4000/3350	8818/7385	900/900	130/130	15.5	320	1018
315/70R22.5	20PR	315	70	22.5	154/150(152/148)	L(M)	BF660	M+S	LAR	9.00	3750/3350	8270/7390	900/900	130/130	15	320	1012
315/70R22.5	20PR	315	70	22.5	154/150(152/148)	L(M)	BF628	M+S	LAR	9.00	3750/3350	8270/7390	900/900	130/130	21	320	1024
315/80R22.5	20PR	315	80	22.5	156/152(154/151)	L(M)	BF638	M+S	LAR	9.00	4000/3550	8820/7830	860/860	125/125	23	310	1088
315/80R22.5	20PR	315	80	22.5	156/152(154/151)	L(M)	BF124	M+S	LAR	9.00	4000/3550	8820/7830	860/860	125/125	15.5	310	1073
315/80R22.5	20PR	315	80	22.5	156/152(154/151)	L(M)	BF628	M+S	LAR	9.00	4000/3550	8820/7830	860/860	125/125	20	310	1082
315/80R22.5	20PR	315	80	22.5	156/152(154/151)	L(M)	BF121	M+S	LAR	9.00	4000/3550	8820/7830	860/860	125/12			

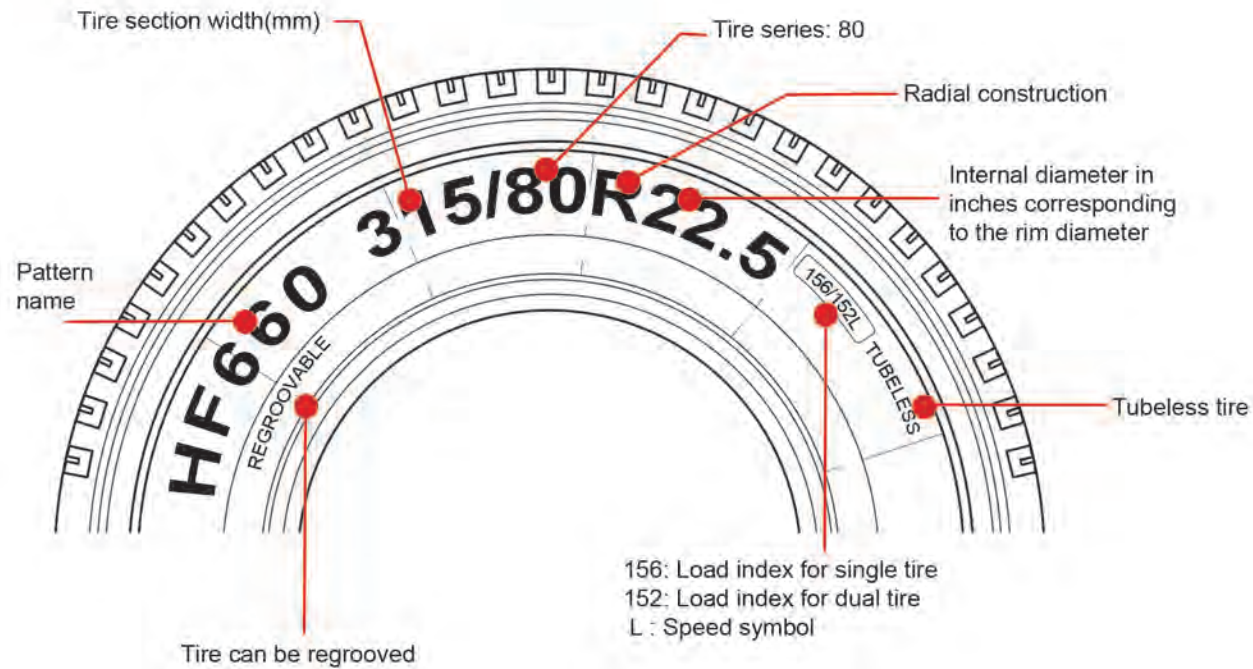

Refer to the Speed Symbols and Load Capacity Index tables below



Before fitting, it is essential to check the different markings to ensure that the tires meet the maximum load and speed possibilities and/or the regulations in force

Speed Symbols

SI	km/h
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170

Load Capacity Index

LI	KG	LI	KG	LI	KG
115	1215	136	2240	157	4125
116	1250	137	2300	158	4250
117	1285	138	2360	159	4375
118	1320	139	2430	160	4500
119	1360	140	2500	161	4625
120	1400	141	2575	162	4750
121	1450	142	2650	163	4875
122	1500	143	2725	164	5000
123	1550	144	2800	165	5150
124	1600	145	2900	166	5300
125	1650	146	3000	167	5450
126	1700	147	3075	168	5600
127	1750	148	3150	169	5800
128	1800	149	3250	170	6000
129	1850	150	3350	171	6150
130	1900	151	3450	172	6300
131	1950	152	3550	173	6500
132	2000	153	3650	174	6700
133	2060	154	3750	175	6900
134	2120	155	3875	176	7100
135	2180	156	4000	177	7300

Important instructions for safe inflation

Over-inflation reduces:

- Comfort
- Grip
- Braking distance
- Tire life span, particularly on drive axle tires
- Safety


Under-inflation leads to:

- Reduced vehicle handling and safety
- A reduction in casing retreadability
- An increase of rolling resistance consequently of fuel consumption

Over-inflation

Under-inflation

Effect of inflation pressure on tire life

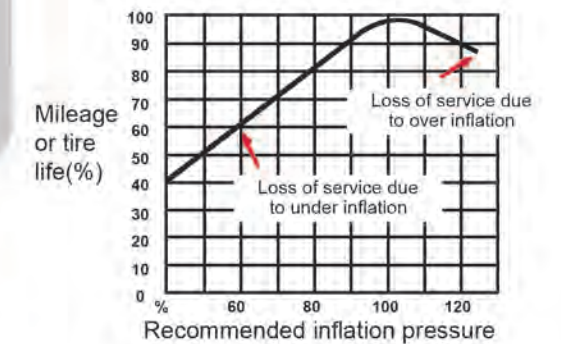

ADVICE BEFORE INFLATION

- 1 Weigh your vehicle and its load, axle by axle, to determine tire pressure
- 2 Measure the pressure when cold (when the vehicle has been stationary for several hours); pressures must be checked at regular intervals and during each service
- 3 Important safety instruction: pressure increases when the vehicle is in motion, never reduce the pressure of a hot tire
- 4 Pressure gauges: must be accurate, handled with care and calibrated regularly



Caution: Driving with insufficient pressure can damage your tires. Have your tires fully checked over by an expert

